



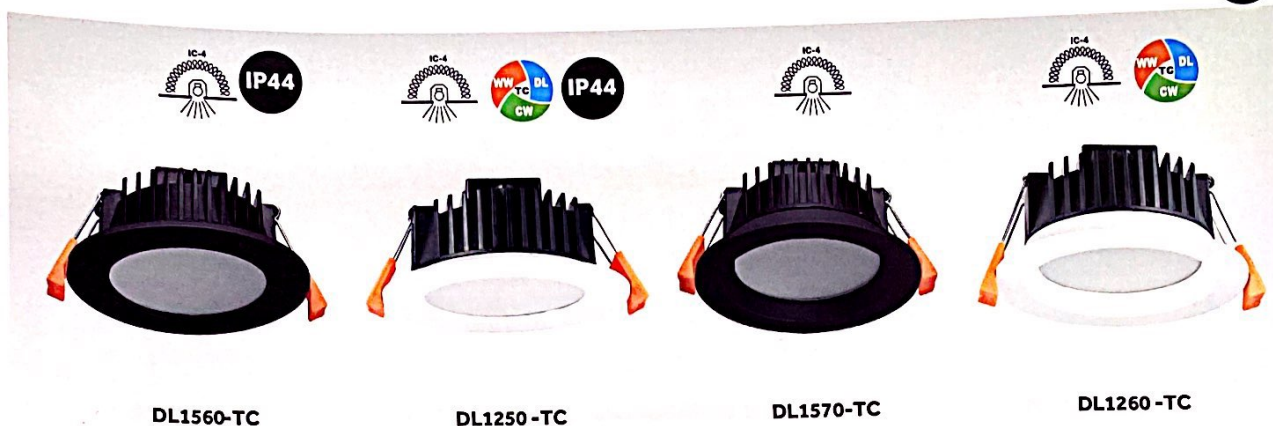


## DIMENSIONS

(DL1560, DL1250 - TC)



(DL1570, DL1260 - TC)



## PRODUCT FEATURES

- New generation SMD LED chip
- Dimmable range 3%-100%
- IC-4 recessed luminaire, lower fire hazard risk
- Pre-set tri-color-temperature switch for diverse needs
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation
- Three year replacement warranty
- No compatible with touch dimmer

## PACKAGING(DL1560-TC, DL1250 - TC)

- Packaging L115\*W115\*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5\*W36.5\*H23.5cm

## PACKAGING(DL1570-TC, DL1260 - TC)

- Packaging L115\*W115\*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5\*W36.5\*H23.5cm

| Model No.     | Input    | Power | Lumen      | CCT               | Beam Angle | CRI | Dimmable | Fitting Colour | N.W   | G.W  |
|---------------|----------|-------|------------|-------------------|------------|-----|----------|----------------|-------|------|
| DL1560-TCWH   | 200-240V | 13W   | 890-1080lm | 3000K/4000K/5000K | 120°       | >80 | Yes      | White          | 9.2Kg | 12Kg |
| DL1560-TC SCH | 200-240V | 13W   | 890-1080lm | 3000K/4000K/5000K | 120°       | >80 | Yes      | Santin Chrome  | 9.2Kg | 12Kg |
| DL1560-TCBK   | 200-240V | 13W   | 890-1080lm | 3000K/4000K/5000K | 120°       | >80 | Yes      | Black          | 9.2Kg | 12Kg |

| Model No.     | Input    | Power | Lumen      | CCT               | Beam Angle | CRI | Dimmable | Fitting Colour | N.W   | G.W  |
|---------------|----------|-------|------------|-------------------|------------|-----|----------|----------------|-------|------|
| DL1250-TC WH  | 200-240V | 13W   | 880-1050lm | 3000K/4000K/5000K | 120°       | >80 | Yes      | White          | 9.2Kg | 12Kg |
| DL1250-TC SCH | 200-240V | 13W   | 880-1050lm | 3000K/4000K/5000K | 120°       | >80 | Yes      | Santin Chrome  | 9.2Kg | 12Kg |

| Model No.     | Input    | Power | Lumen      | CCT               | Beam Angle | CRI | Dimmable | Fitting Colour | N.W   | G.W  |
|---------------|----------|-------|------------|-------------------|------------|-----|----------|----------------|-------|------|
| DL1570-TCBK   | 200-240V | 13W   | 850-1060lm | 3000K/4000K/5000K | 90°        | >80 | Yes      | Black          | 9.2Kg | 12Kg |
| DL1570-TC SCH | 200-240V | 13W   | 850-1060lm | 3000K/4000K/5000K | 90°        | >80 | Yes      | Santin Chrome  | 9.2Kg | 12Kg |
| DL1570-TCWH   | 200-240V | 13W   | 850-1060lm | 3000K/4000K/5000K | 90°        | >80 | Yes      | White          | 9.2Kg | 12Kg |

| Model No.     | Input    | Power | Lumen      | CCT               | Beam Angle | CRI | Dimmable | Fitting Colour | N.W   | G.W  |
|---------------|----------|-------|------------|-------------------|------------|-----|----------|----------------|-------|------|
| DL1260-TC WH  | 200-240V | 13W   | 840-1000lm | 3000K/4000K/5000K | 90°        | >80 | Yes      | White          | 9.2Kg | 12Kg |
| DL1260-TC SCH | 200-240V | 13W   | 840-1000lm | 3000K/4000K/5000K | 90°        | >80 | Yes      | Santin Chrome  | 9.2Kg | 12Kg |

## PHOTOMETRIC DATA

